


RQ-070 - Fluid Injection Skid

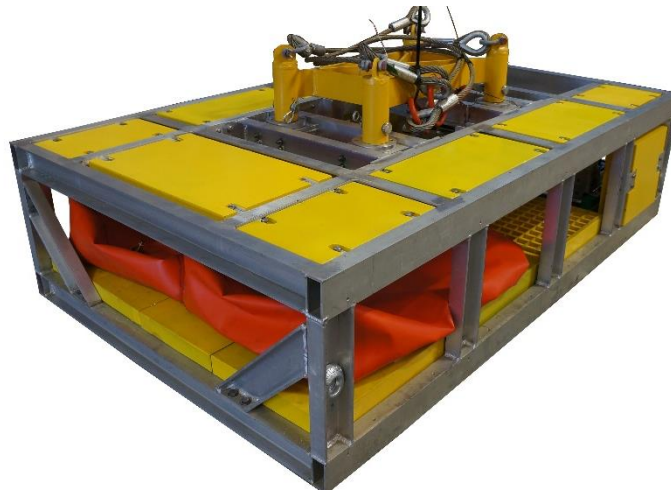

Key Features:

- Full proportional pressure control.
- Adaptable – can control multiple outputs.
- Robust design.
- Different pressure and flow options available.
- Multi-Purpose Skid.

WHATS INCLUDED

Multi-Purpose Skid with buoyancy.
 Skid Lift Frame.
 10,000 psi IHPU.
 Subsea Gauges to monitor; system, Output A and Output B pressures.
 65L reservoir.
 Operational hoses.
 Operations Manual.
 Certificate Pack.

OPTIONS

Spares Kit.
 Fluid Reservoirs.
 Alternative Ratio Pumps.

Description

The ROVQUIP standard ROV Tooling Skid is suitable for connection to most work class ROV's. The pin configuration is to fit the Triton XLX ROV as standard but can be adapted to any other work class ROV.

The Fluid Injection Skid is designed for various pressure testing and fluid injection applications subsea. It comes with a proportional 0-10,000 PSI IHPU and is designed to be used with a client provided Hot Stab.

The system comes with 2 x 200L soft fluid reservoirs which are compatible with Glycol, seawater and oil.

We can build fluid injection skids to a variety of pressure and flow outputs and welcome any new requests if the criteria specified here doesn't meet your application.

RQ-070 - Fluid Injection Skid

Overall Specifications	
Weight in Air	440 Kg
Weight in Water	-20 Kg
Dimensions	L3605 x W1905 x H610mm
Suitable Media	Seawater, Glycol, Hydraulic Oil, Methanol
Input / Outputs	
Max Input Pressure	210 Bar (3,000 PSI)
Max Input Flow	0-40 L/min
Max Output Pressure	690 Bar (10,000 PSI)
Max Output Flow	8.7 L/min
Hydraulic Connections	
Pressure	8 JIC
Return	8 JIC
Outputs	12 JIC
Pilots	4 JIC
Gauge Points	4 JIC

WHATS INCLUDED

Multi-Purpose Skid with buoyancy.
 Skid Lift Frame.
 10,000 psi IHPU.
 Subsea Gauges to monitor; system, Output A and Output B pressures.
 65L reservoir.
 Operational hoses.
 Operations Manual.
 Certificate Pack.

OPTIONS

Spares Kit.
 Fluid Reservoirs.
 Alternative Ratio Pumps.