

Aleron 520 Bar High Pressure Jetting System

WHATS INCLUDED


520bar Jetting System.
ROV Handle and Point Jetting Nozzle.
All Operational Hoses.
Suction Filter.
Operations Manual.
Certificate Pack.

OPTIONS

Spares Kit.
Dual Nozzle Lance.
Nozzle kit; Flat Jetting Nozzle and Rotating Nozzle.
ROV handle options; D-Type, Fishtail, T-bar.

PRODUCT CODE

RQ-005

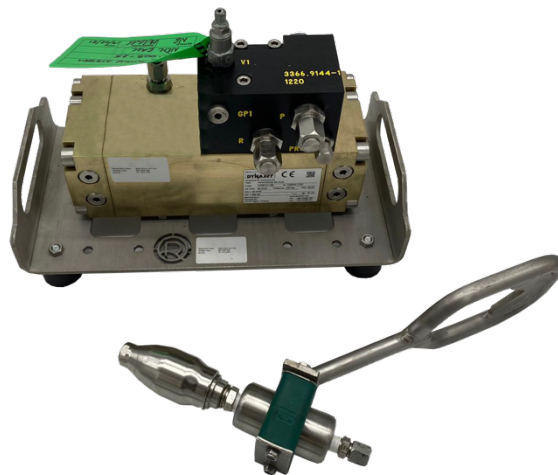

Key Features

- Industry recognised standard cleaning tool.
- Can be adapted to use as a fluid injection unit.
- Robust, easy to use and easy to fix pumps.
- Very small footprint with integral p.o check, flow control and relief valve
- Comes complete with all hoses, ROV handle and jetting nozzle

Description

The Aleron 520 Bar High Pressure Jetting System is based around the industry standard Dynaset pump. No other pump gives the same power and reliability.

The pump can be connected to any subsea reservoir by the suction port (12 JIC / 3/4" BSPF) or filter.

The standard high-pressure jetting system has a pressure range from 0.5 - 520 Bar.

Web: www.aleron-group.com

Email: info@aleron-group.com

Tel: +44 (0) 1467 424060

Aleron 520 Bar High Pressure Jetting System

Overall Specifications

Weight in Air	32kg
Weight in Water	29kg
Dimensions	L300 x W200 x 230mm
Suitable Media	Sea Water, Glycol, Hydraulic Oil

Input / Outputs

Max Input Pressure	210 BAR (3,000 PSI)
Max Input Flow	30-60 LPM
Max Output Pressure	520 BAR (7,500 PSI)
Max Output Flow	30 LPM

Hydraulic Connections

Pressure	8 JIC
Return	8 JIC
Pilot	4 JIC
Suction	12 JIC / 3/4" BSPF

WHATS INCLUDED

520bar Jetting System.
 ROV Handle and Point Jetting Nozzle.
 All Operational Hoses.
 Suction Filter.
 Operations Manual.
 Certificate Pack.

OPTIONS

Spares Kit.
 Dual Nozzle Lance.
 Nozzle kit; Flat Jetting Nozzle and Rotating Nozzle.
 ROV handle options; D-Type, Fishtail, T-bar.

PRODUCT CODE

RQ-005



Web: www.aleron-group.com

Email: info@aleron-group.com

Tel: +44 (0) 1467 424060